



BONA POLISH

FOR FINISHED WOODEN FLOORS

Product description

Bona Polish is a ready-to-use waterborne maintenance product specifically designed for use on finished wooden surfaces and therefore reinforced with durable polyurethane.

- Formulated for ease of use and guards for an even result.
- Reinforced with polyurethane for increased life length.
- Good resistance to scuff marks and scratching.
- Available in both Gloss and Matt sheen.

Technical data

Binding agent:	Acrylate/Polyurethane
Dilution:	Do not dilute, the product is ready-to-use
Drying time:	At least 1 hour at 20°C/ 60% RH.
Application tools:	Bona Microfibre Applicator Pad
Coverage:	Approx. 50 m ² /litre
Safety:	Keep out of the reach of children.
Cleaning:	Tools – In water directly after use. Dried material – Bona Polish Remover
Shelf life:	Polish Matt , <u>1 year</u> from the date of production, in unopened original container. Polish Gloss , <u>2 years</u> from the date of production, in unopened original container.
Storage/Transport:	Store frost-free.
Disposal:	Wastes and emptied containers should be handled in accordance with local regulations.
Package size:	10 x 1 litre (50 boxes per pallet) 3 x 5 litre (44 boxes per pallet)

Bona[®]



BONA POLISH

FOR FINISHED WOODEN FLOORS


SITWORK

Preparations

Ensure surface is clean and dry. Do not use polish on any floor that has been previously treated with wax. If the surface has been treated with a different type of polish before, surface is unknown or factory pre-finished then prior to application, make a small test to confirm compatibility. Shake the bottle well before use.

Application

Apply using the Bona MicroFiber applicator pad for a smooth surface. String mops, cotton mops, sponge mops or similar are not recommended for application. Spread a consistent coat over the surface at approx. 50m² per litre. Avoid working into the drying film which may produce streaking. Allow to dry minimum 1 hour before walking on coated floors. If needed, a second coat may be applied after this time. Clean tools with water directly after use.

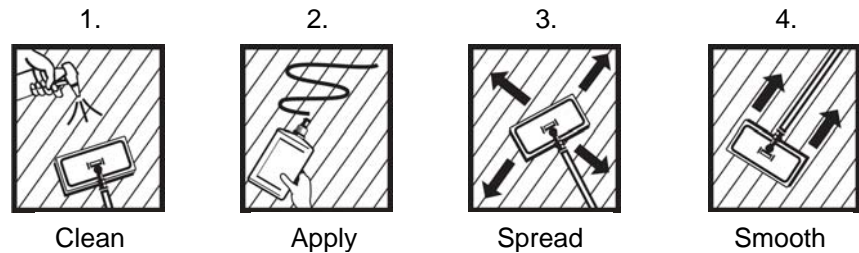

Tips

- When smoothing out the polish, keep the applicator pad flat to the surface, going wall-to-wall. Avoid lifting the applicator along the way which produces bubbles that may cause an uneven sheen.
- If you have a matt floor and want to have it gloss or vice versa, then often two coats of polish are necessary to achieve a uniform sheen. Respect suggested drying time between coats.

Bona[®]