



Parquet Barrier Seal

Information

Parquet Barrier Seal is a fast drying sealer, designed as a barrier basecoat to isolate any potential contaminants (e.g. traces of wax) on older floors that may have escaped removal by preparatory sanding. Becker Acroma's waterborne flooring lacquers can then be applied on top.

Gives good build, imparts a more mellow appearance to lighter timbers and minimises grain raising.


Fast drying

Shellac Based Barrier Seal: HL2005

Always stir well before use. For professional use only.

Application

Can be applied with a brush, roller or applicator. Ensure a smooth even coating.

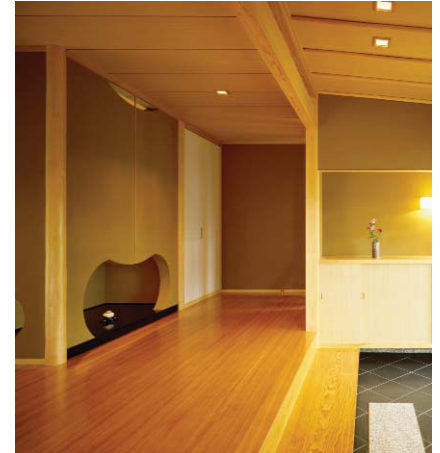

Enhancing the appearance of your floor

Uses

Designed for use on hardwood and softwood floors as a first coat, prior to over coating with Becker Acroma's Parquet One, Parquet Performance or Parquet Pro waterborne lacquers.

Preparation

Sand floor using 100 or 120 grit paper. Remove sanding dust prior to applying barrier seal.

Drying

De-nibb from 30 minutes onwards subject to thickness of coat, method of application and ambient drying conditions. Sealer should be left for three hours at normal room temperature prior to subsequent coating with flooring lacquer.

Specific Gravity

0.855+/- 0.03

Viscosity

14-16 secs. B4 @ 20°C

Coverage

10-15 sq metres per litre dependent upon surface and application.

Thinners / Cleaner

Tools, brushes etc. may be cleaned using Becker Acroma's DT2018.

Storage

12 months in unopened containers stored away from direct heat.

Health and Safety

Flash point below 21°C. Observe all usual precautions for highly flammable liquids.

Please refer to the Health and Safety data sheet for detailed information.